


BraceNBlock™ Edge

24" Metal Silt Fence

- Attractive, unique, patented, double sided, metal wire mesh design allows it to adhere to and grab the surrounding soil keeping it securely in place preventing washouts under the silt fence.
- Maximum soil anchoring.
- Patented soil bracing and root blocking design:
 - Made using galvanized metal wire mesh coated with vinyl enclosing a water permeable root blocking fabric.
 - Professional, heavy gauge construction.
 - UV inhibitors block sun rays for maximum vinyl durability.
- Durable, long lasting, and sturdy.
- Easy to use and install with minimal digging.
- Flexibility allows it to conform to any installation need.
- Light weight and easy to handle.
- Replaces conventional edging products with its advantages, benefits, and multiple uses.
- Unconditional money back guarantee.

25 foot roll 24 inches wide.

Installation Instructions:

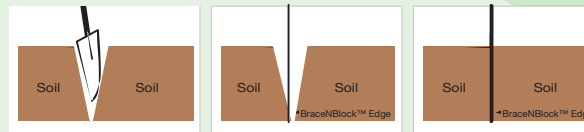

1. Dig Trench

2. Place Silt Fence

3. Backfill

- Dig an 8 inch deep trench along the silt fence alignment.
- Drive steel or hardwood wooden posts 36 inches long at least 16 inches below the ground along the trench every 6 to 8 feet and at splice locations.
- Place BraceNBlock™ Edge Silt Fence in the trench at least 8 inches below the ground, overlap the ends at least 6 inches at the splice locations, and wire the silt fence to the posts.
- Backfill the trench and compact the soil on both sides of the silt fence.

Tips:

- Cut to size with wire cutters or hacksaw.
- When properly installed your finished result will last for years.

Caution:

- Wear gloves for extra protection.
- Wear eye protection when using any striking tool.



Product Cat. No. 24MSF



U.S. Patent Nos. 6,108,972; 6,189,263; 6,230,439; 6,270,286; And Foreign Patent Rights Pending.
BraceNBlock™ And Logo Are Trademarks Of Solis International, Inc.
Copyright © 2002 By Solis International, Inc. All Rights Reserved.



Please call us and visit our web site for more information on our products, pricing, and distribution.
Solis International, Inc., Memorial City Professional Building II, 909 Frostwood, Suite 162, Houston, Texas 77024
Telephone: (713) 827-1500, Fax: (713) 984-1500, Web Site: www.BraceNBlockEdge.com, Email: PatSolisMD@SolisInternationalInc.com

